

# T ECHNICAL INFORMATION




New Tool

**Models No.** ▶ 6904VH

**Description** ▶ Impact Wrench

## CONCEPTION AND MAIN APPLICATIONS

Model 6904H/VH was developed as an improved version of Model 690(discontinued). More compact, lightweight and well-balanced for increased maneuverability. Mode 6904H and Model 6904VH are the same except the tool speed.

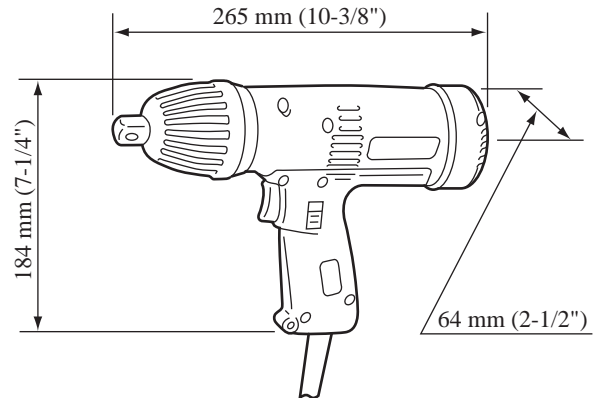

Model	Tool speed
<b>6904H</b>	Single speed
<b>6904VH</b>	Two variable speeds

### ► Specifications

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output(W)
			Input	Output	
100	3.8	50/60	360	160	290
115	3.3	50/60	360	160	290
200	1.9	50/60	360	160	290
220	1.7	50/60	360	160	290
230	1.7	50/60	360	160	290
240	1.6	50/60	360	160	290

#### Capacities

<b>Standard Bolt</b>	M10- M16 (3/8"-5/8")
<b>High Tensile Bolt</b>	M10- M12 (3/8"-7/16")
<b>Self-Drilling Screw</b>	6mm(1/4") ---- Model 6904VH only
<b>Square Drive</b>	12.7mm(1/2")
<b>Net weight</b>	1.8 Kg (4.0 lbs)

Model No	<b>6904H</b>	<b>6904VH</b>
<b>No Load Speed (RPM)</b>	2,400	High 0-2,400 Low 0-2,100
<b>Impact per Min.</b>	3,000	High 0-3,000 Low 0-2,500
<b>Fastening Torque</b>	2,000 Kg. cm (145 ft lbs)	High 2,000 Kg.cm (145 ft. lbs) Low 1,500 Kg.cm (109 ft. lbs)

### ► Standard equipment

Socket 17-39, 21-41, 26-45, Steel Carrying Case

### ► Optional accessories

Various size of Socket, Extension Bar, Universal Joint, Bit Adapter (for Model 6904VH only), Various size Phillips Bits (for Model 6904VH only), Socket Bits 8-55, 3/8"-55 (for Model 6904VH only)

The standard equipment for the tools shown may differ form country to country