

**Models No.** ▶ BML145, BML185


**Description** ▶ Rechargeable Flashlight

## CONCEPT AND MAIN APPLICATIONS

Models BML145/ BML185 have been developed as our first rechargeable flashlights that are powered by Li-ion battery. Whilst having the same basic construction as our current models ML140/ ML180, features the rubberized soft grip designed to best-fit to user hand.

BML145 is powered by 14.4V/3.0Ah Li-ion battery, and BML185 by 18V/3Ah Li-ion battery.

Both Charger and battery are not supplied with the Flashlights.

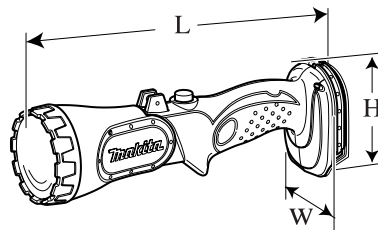

Dimensions: mm (")	
BML145, BML185	
Length (L)	284 (11-1/8)
Width (W)	84 (3-5/16)
Height (H)	96 (3-3/4)

## ► Specification

Specification		Model	BML145	BML185
Battery	Voltage: V		14.4	18
	Capacity: Ah		3.0	
	Cell		Li-ion	
Current: A			0.7	0.6
Illuminance*: lx			4,500 or over	
Continuous illumination: minute [when used with 3.0Ah Li-ion battery]			220 with BL1430	260 with BL1830
Bulb	Gas		Krypton	Xenon
	Voltage: V		12	18
	Current: A		0.7	0.6
	Service life: h		50 or longer	
Net weight**: kg (lbs)			0.36 (0.75)	

\*Illuminance: measured at a point in front of and about 100cm away from light source

\*\*Net weight: without battery

## ► Standard equipment

Shoulder strap ..... 1 pc

Bulb ..... 2 pc (one set in place in the tool, the other in flashlight head)

**Note:** The standard equipment for the tool shown above may differ from country to country.

## ► Optional accessories

Charger DC14SA

Charger DC24SA

Charger DC14SC

Charger DC24SC

Charger DC18SC

Bulb set (2pcs per package)