


T ECHNICAL INFORMATION

Model No. ▶ MR051

Description ▶ Rechargeable Battery Cordless Radio

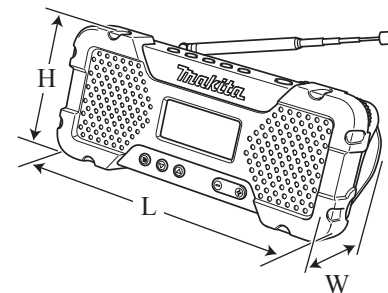

CONCEPT AND MAIN APPLICATIONS

Model MR051 is cordless radio powered by 10.8V Li-ion battery.

Its main benefits are:

- Compact design for high portability
- Dual front speakers for stereo sound
- Push-button operated AM/FM digital tuner with LCD digital display
- Quick manual tuning by turning station selection dial
- Equipped with AUX-IN jack and earphone jack
- Rotating sky hook convenient to hang the radio on scaffolding pipe, etc.
- Shoulder strap holes for commercial shoulder straps generally available

Dimensions: mm (")	
Length (L)	169 (6-5/8)
Width (W)	83 (3-1/4)
Height (H)	74 (2-15/16)

This product is available in two colors, Makita-blue and white.

► Specification

Battery	Cell	Li-ion
	Voltage: V	10.8*2, (10.8/12V max.*3)
	Capacity: Ah	1.3
	Charging time (approx.): min.	50 with DC10WA*2, (DW10WB*3)
Practical max output		1.0W
Continuous run time on a single battery charge: hour [at full volume]		approx. 2.5 (with BL1013 or BL1014)
Frequency band	for USA	AM: 530 - 1710 kHz FM: 87.5 - 108 MHz
	for European countries	AM: 522 - 1620 kHz FM: 87.5 - 108 MHz
Speaker		2.0W x 2
Weight according to EPTA-Procedure 01/2003*4: kg (lbs)		0.49 (1.1)

*2 For all countries except North and Central American countries (Mexico and Guam are included.)

*3 For North and Central American countries except Mexico and Guam

*4 With battery

► Standard equipment

No

► Optional accessories

Charger DC10WA*2

Li-ion battery BL1013*2

Charger DC10WB*3

Li-ion battery BL1014*3

Strap