

TECHNICAL INFORMATION



PRODUCT


P 1 / 1

Models No. ▶ MLT100

Description ▶ Table Saw 260mm (10-1/4")*₁
 Table Saw 255mm (10")*₂

*₁ for European countries

*₂ for all countries except European countries

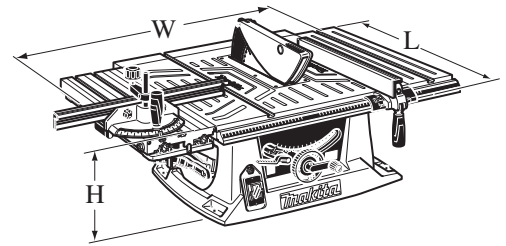

CONCEPT AND MAIN APPLICATIONS

Model MLT100 has been developed as a cost-competitive sister model of Models 2704/2705.

The machine for USA and Canada feature blade guard in compliance with the latest UL Standards.

Note: MLT100 for USA and Canada differs from the image shown above in some details.

Dimensions: mm (")	
Length (L)	726 (28-1/2)
Width (W)	984 (38-3/4)
Height (H)	333 (13-1/8)

Specification

Voltage (V)	Current (A)	Cycle (Hz)	Continuous Rating (W)		Max. Output (W)
			Input	Output	
110	13.6	50/ 60	1,500	---	---
120	13.0	50/ 60	1,500	---	---
230	6.5	50/ 60	1,500	---	---

		European countries	USA, Canada Mexico, Panama	Other countries
Saw blade: mm (")	Diameter	260 (10-1/4)	255 (10)	
	Hole diameter	30 (1-3/16)	15.88 (5/8)	25.4 (1)
No load speed: min.-1=rpm		4,300		
Bevel cutting capacity: degrees		0 to 45		
Cutting capacities: mm (")	at 90 degrees	93 (3-5/8)	90.5 (3-9/16)	
	at 45 degrees	64 (2-1/2)	63 (2-1/2)	
Soft start		Yes: all high voltage areas except UK and those in Asia No: UK, Asia, all low voltage areas		
Electric brake		Yes		
Double insulation		Yes		
Power supply cord: m (ft)		2.5 (8.2)		
Net weight*: kg (lbs)		34.8 (76.7)		

*Weight according to EPTA-Procedure 01/2003

Standard equipment

TCT saw blade 1 Wrench 2
 Rip fence..... 1 Hex wrench 1
 Miter gauge (with vise) 1 Triangular rule 1
 Push stick 1

Note: The standard equipment for the tool shown above may vary by country.

Optional accessories

Stand set (wheeled stand) Model WST03
 TCT saw blades